


DRAGON X SPSL-HF-4.0/8.0 HC

LEADER IN PORTABILITY AND POWER

Value
Plus+
by TXR

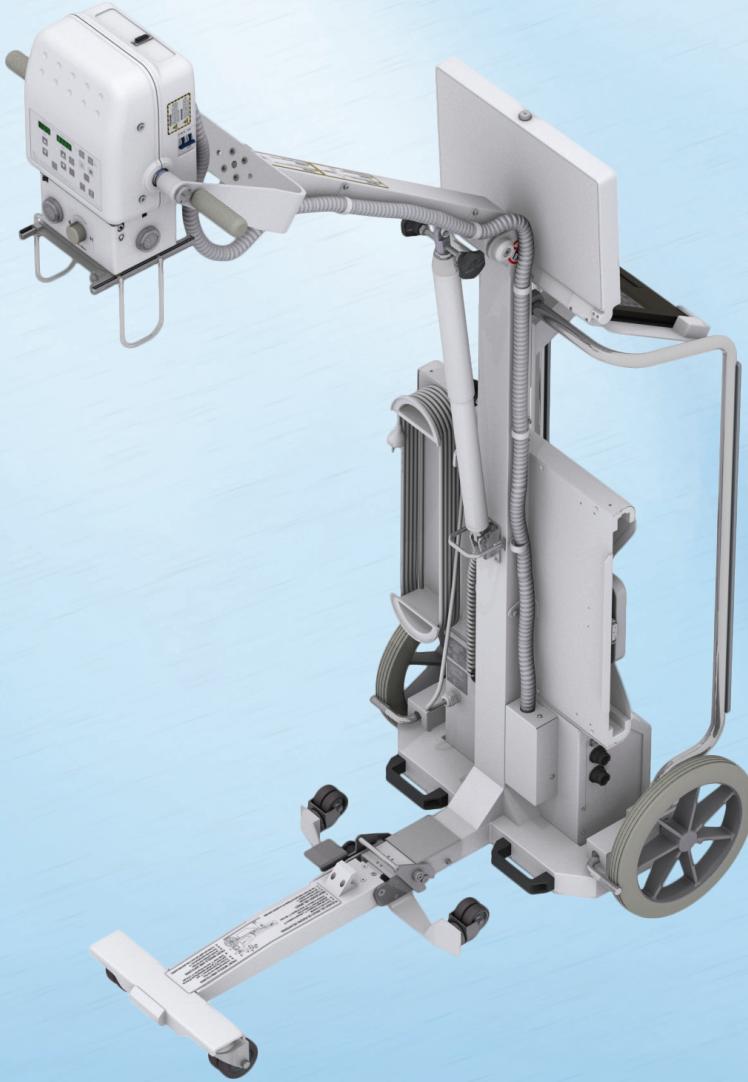

- Powerful 100mA., 125 kVp 4kW or 8kW HF Generator
- LED Collimator
- Exceptional Arm Mobility
- Activate Collimator Light from 5 Locations
- Fractional Focal Spot Tube for Greater Detail
- Technique Selection at Tube or Laptop
- Locking Laptop Cabinet

RAYTECH DIAGNOSTICS
<https://www.raytechdiagnostics.com/>
sales@raytechdiagnostics.com
613-721-1982

PORTABLE X-RAY SYSTEM

SPECIFICATIONS		HIGH FREQUENCY X-RAY GENERATORS
MODELS	SPSL-HF4.0HC / SPSL-HF8.0HC	
kW RATING	4.0 / 8.0	
kVp RANGE in 1 kVp STEPS accuracy	40 to 125 +/- 3%	
HIGH FREQUENCY RIPPLE	300 kHz	
mA STATIONS	5, 6.4, 8, 10, 12.5, 16, 20, 25, 32, 40, 50, 64, 80, 100	
EXPOSURE TIME RANGE	0.001 - 10 seconds	
NUMBER OF STATIONS	41 (in 25% steps)	
mAs RANGE	0.1 - 250 mAs	
NUMBER OF STATIONS	34 (in 25% steps)	
accuracy	5%	
USER FRIENDLY MULTI LANGUAGE SELECTION	English, Spanish, French, German, Russian, Polish and Turkish	
X-RAY TUBE		
Stationary Anode	0.5 mm - 1.8 mm / 0.6 mm - 2.8 mm	
TWO Focal Spots	40.000 HU 76.000 HU	
Anode Heat Storage Capacity		
LASER LIGHT COLLIMATOR	Optional on 4.0 – Standard on 8.0	
POWER CORD	19.7 ft. (6 meters)	
EXPOSURE CORD	9.8 ft. (3 meters)	
LINE REGULATION	Single-Phase Line Regulation OUTPUT POWER ADAPTATION TO POWER LINE CONDITIONS	
LINE POWER REQUIREMENTS +/- 10% VAC (50/60Hz)	120 VAC - 240 VAC / 220 VAC - 240 VAC 4.0 requires solid 20 amp breaker on 120V line for full power–8.0 requires 220-240 VAC	
WEIGHT / DIMENSIONS	Max: 65.3”L x 26.3”W x 87.7”H (1660mm x 670mm x 2228mm) 127.8 lb (58kg) / Laptop 4.4 lb (2kg) / Detector 6.8 lb (3kg)	



RAYTECH DIAGNOSTICS
<https://www.raytechdiagnostics.com/>
sales@raytechdiagnostics.com
 613-799-4171