




Medi-1200

Medical Imaging Systems

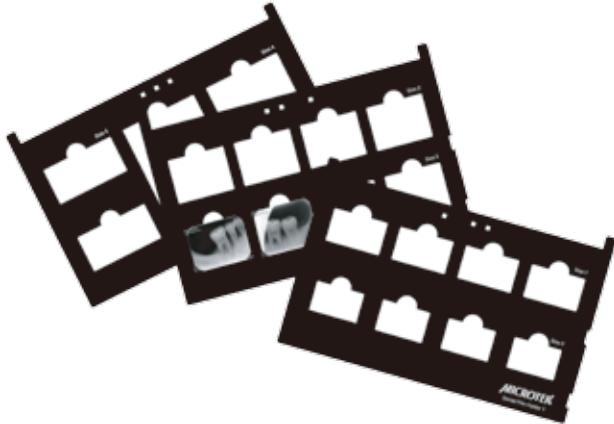

**Hi-Speed
Film
Digitizer**

Professional Film Digitizer for Dental X-ray

Designed specially by Microtek, the Medi-1200 can easily transfer traditional X-ray film into digital format for further use later. Smart-Scan button and customized templates easily carry out the auto-crop function, scanning and processing multi-films in less than 30 seconds. The Medi-1200 offers 600-dpi optical resolution and 16-bit grayscale, ensuring that your scans will capture all the details presenting in light and darkness areas.

Also, the Hi-Speed USB (USB 2.0) interface of the Medi-1200 gives effortless "plug-and-play" connectivity, providing the professionals a smart and easy way to digitize and observe X-ray films.


In addition, designed with a space-saving consideration, the Medi-1200 occupies less space, and perfect for clinics. By MiPAX-Dental, the gateway software, the X-ray films digitized by the Medi-1200 can be easily and quickly integrated with HIS/PACS system.

Features

- Cost-effective and reliable digitizer with compact design
- Smart-Scan button and customized templates easily auto-crop multi-films in less than 30 seconds
- Easy to scan, simply hits "Scan" button on the cover
- Provides 600 dpi optical resolution for better image details
- Covers various sizes of dental x-ray films
- Delivers high quality and excellent performance for the professionals

Variety of Templates for Five Sizes of Dental Films

Medi-1200 with three kinds of customized templates that covers five sizes of dental intraoral films and allows dental professionals to scan multi-films at a time.

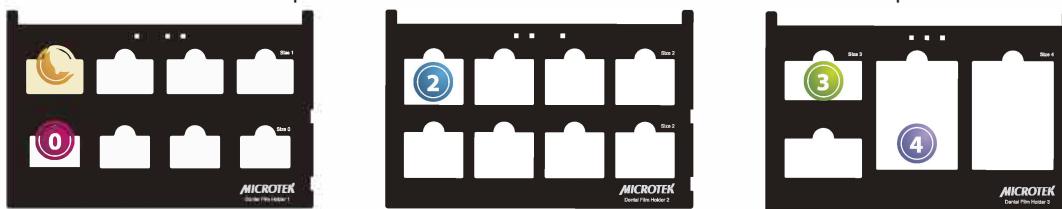

Templates	Size	0	1	2	3	4
Template 1		✓				
Template 2			✓			
Template 3				✓		✓

Smart-Scan and Auto-Crop Multi-Films in Less Than 30 Sec.



Specifications

Three templates cover five sizes of films	Size 0, 1, 2, 3, 4
Scanning area	8.5" x 5"
Scanning mode	8 / 12 / 16-bit grayscale
Optical resolution	600 x 1200 dpi
Interface	Hi-Speed USB (USB 2.0)
Dimensions (L x W x H)	300 x 297 x 110 mm
Weight	4.4 kg
Power supply	110 to 240 VAC, 47 to 63 Hz
Max power consumption	60 Watts
System requirements	<ul style="list-style-type: none">• CD-ROM drive• 2 GB RAM or more• Pentium IV or higher• With Hi-Speed USB (USB 2.0) port• Microsoft Windows 2000, XP, or Vista

Certifications

CE, FCC, RoHS, SFDA (Certificate No. 1310428)

© 2010 Microtek. Microtek, ScanMaker, ArtixScan, and ScanWizard are trademarks or registered trademarks of Microtek International, Inc. All other brands, product names and logos herein are trademarks or registered trademarks of their respective holders. Specifications, software bundles and accessories are subject to change without notice. Delivery of technical support services subject to change without notice. Not responsible for typographical errors. Digital Imagery © 2010 Jupiterimages Co. Apr. 30, 2010

RAYTECH DIAGNOSTICS

<https://www.raytechdiagnostics.com/>
sales@raytechdiagnostics.com
613-799-4171

Microtek International Inc.
No.6, Industry East Road 3,
Science-Based Industrial Park,
Hsinchu, Taiwan 30077



EVESTAR GmbH,
Lingelserstraße 127-129
D-47877 Willich, Germany